


## ID-Safe-A637-I3

HF Inlay and Label

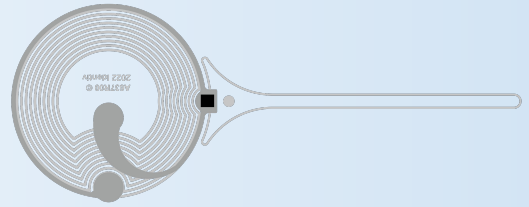

### IC Speciality

Identiv's ID-Safe-A637-I3, powered by NXP ICODE®3 IC, delivers enhanced performance with SELFAdjust technology and a fast 212 kbit/sec read rate. ID-Safe-A637-I3 offers 2.4 kbit of user memory and extended NFC features, including automatic mirroring of UID, counter, and tamper status.

Security is strengthened with a Customizable Originality Signature and two password-protected untraceable modes, making ICODE®3 ideal for applications demanding high performance, security, and data protection.

### Key Features

- SELFAdjust mechanism for 23pF variant to adjust RF performance to the optimum in current environment
- Customizable Originality Signature of 32 or 48 bytes (based on ECC) for tag authenticity
- App-free first-opening and current status detection (incl. mirror) for ICODE3 TagTamper
- Available as **dry inlay**, **wet inlay**, and **label**

#### Frequency

- NFC 13.56 MHz

#### Antenna Dimensions

- 68.2 x Ø 26 mm

#### Chip

- NXP ICODE®3

#### International Standards

- NFC Forum Type 5 Tag
- ISO/IEC 15693

#### Industries

- Beauty and personal care
- Food and Beverage
- Pharma and Healthcare
- Retail and Consumer goods

Explore all of Identiv's products at:  
<https://identiv.com/product-finder/>

## Specifications

Format	Dry Inlay	Wet Inlay	Label
Product Part Number	9001144	9001145	9001146
Manufacturing Part Number	I00XXXIR9A26	I00PADIR9A26	L15XADIR9A26
IC	NXP ICODE® 3	NXP ICODE® 3	NXP ICODE® 3
User Memory	2432 bits	2432 bits	2432 bits
Antenna Dimension	68.2 x Ø 26 mm	68.2 x Ø 26 mm	68.2 x Ø 26 mm
Tag Dimensions	68.2 x Ø 26 mm	75 x Ø 30 mm	75 x Ø 30 mm
ISO/IEC Norm	ISO/IEC 15693	ISO/IEC 15693	ISO/IEC 15693
Frequency	13.56 MHz	13.56 MHz	13.56 MHz
Face Material	-	Clear PET	White PET
Thickness	~ 190 µm	~ 285 µm	~ 295 µm
Pitch	85.0 mm	85.0 mm	85.0 mm
Web Width	48.0 mm	48.0 mm	48.0 mm
Operating Temperature	-20°C ~ 70°C (-4°F ~ 158°F), at <60%RH	-20°C ~ 70°C (-4°F ~ 158°F), at <60%RH	-20°C ~ 70°C (-4°F ~ 158°F), at <60%RH
Storage Information	2 years under desiccated condition; 10°C ~ 25°C (50°F ~ 77°F), ≤ 60% RH	1 year under desiccated condition; 10°C ~ 25°C (50°F ~ 77°F), ≤ 60% RH	1 year under desiccated condition; 10°C ~ 25°C (50°F ~ 77°F), ≤ 60% RH

**Contact Information:** [sales@identiv.com](mailto:sales@identiv.com)

Care and handling: To minimize static charge and environmental impact, it's crucial to adhere to standard industry practices related to electronics and RFID when handling RFID inlays, as they are sensitive to ESD.

Application: To ensure that this product meets specific requirements, customers/users must thoroughly test it under end-use conditions. Identiv does not claim that the product is suitable for any particular purpose or use. Additionally, Identiv retains the right to modify, supplement, change, or discontinue product offerings at any time without prior notice. While the information presented here is believed to be reliable, Identiv does not guarantee the accuracy or correctness of the data.

Trademarks: The ownership of trademarks and/or trade names mentioned belongs to their respective owner(s). Some trademarks are used only to identify specific products or services.

Warranty: Please refer to Identiv standard terms and conditions: <https://identiv.com/terms-of-use/>

